



P85


85Ah | 12V | 770A

Electrical Specifications

| | |
|-----------------------------|--------|
| Nominal voltage | 12V |
| Nominal capacity (20h) | 85Ah |
| CCA (-18°C) | 770A |
| Energy (20h, 25C) | 1004Wh |
| Cranking power (10s, -18°C) | 6.1kW |

Mechanical Specifications

| | |
|--------------------------|-------------------|
| Measurements (L x W x H) | 315 x 175 x 175mm |
| Approx. weight | 18.0kg |
| Base hold-down | B3 (f) |
| Layout / terminals | 0 / 1 |
| Polarity | DX |
| Technology | Flooded |
| Case material | PP/PE (silver) |
| Lid material | PP/PE (silver) |

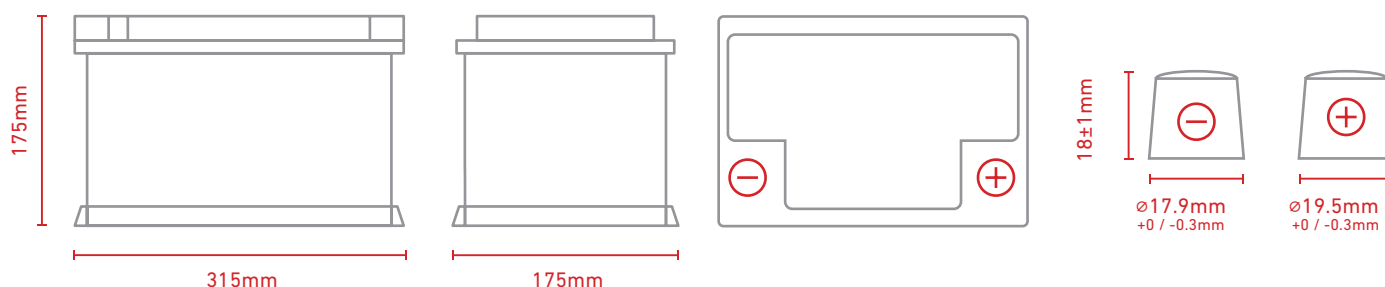

ANTI SPILLING SYSTEM



-18°C TESTED



FLAME ARRESTOR



HIGHER COLD CRANKING CURRENT



INTERNAL LABYRINTH



MAINTENANCE-FREE



MADE IN EUROPE



95% RECYCLABLE



BUILT WITH GREEN ENERGY

