



YTZ5S

4Ah | 12V | 70A



Electrical Specifications

| | |
|-------------------------|------------|
| Nominal voltage | 12V |
| Nominal capacity (25°C) | 4Ah at 10h |
| CCA -18°C | 70A |


| Retention of Charge During Storage at 25°C | | |
|--|-----|---|
| 1 month | 97% | Directly mounted |
| 3 months | 90% | Directly mounted |
| 6 months | 80% | Constant voltage: 14.4V Limit current: 0.8A Charging time: 2 - 3h |
| 12 months | 40% | Constant voltage: 14.4V Limit current: 0.8A Charging time: 4 - 6h |

Mechanical Specifications

| | |
|--------------------------|------------------------|
| Measurements (L x W x H) | 113 x 70 x 85mm |
| Weight | 1.40kg |
| Storage status | Wet |
| Cover | ABS |
| Terminal | C8 |
| Container bottom | ABS |
| Positive plate | PbO ₂ |
| Negative plate | Pb |
| Separator | AGM |
| Electrolyte | Diluted sulphuric acid |
| Safety valve | Rubber |
| Way of sealing | Epoxy resin |

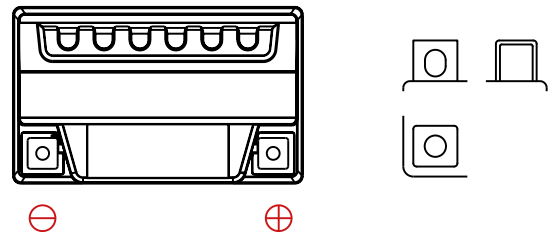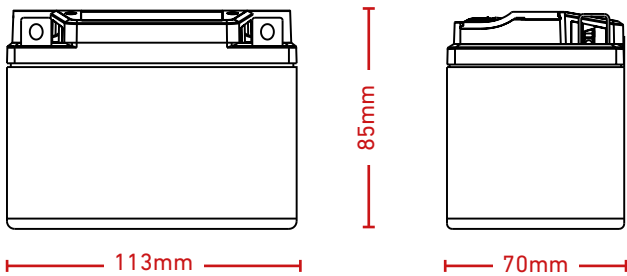

Discharge Current 25°C

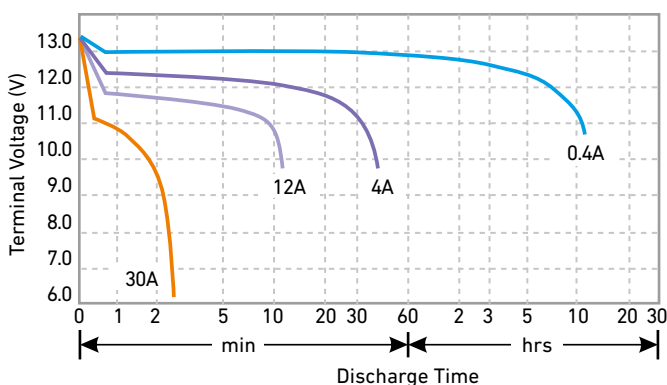

Residual Capacity

