



YB10L-BS

10Ah | 12V | 250A



Electrical Specifications

Nominal voltage	12V
Nominal capacity (25°C)	10Ah at 10h
CCA -18 °C	250A


Retention of Charge During Storage at 25°C		
1 month	97%	Directly mounted
3 months	90%	Directly mounted
6 months	80%	Constant voltage: 14.4V Limit current: 2.0A Charging time: 2 - 3h
12 months	40%	Constant voltage: 14.4V Limit current: 2.0A Charging time: 4 - 6h

Mechanical Specifications

Measurements (L x W x H)	132 x 88 x 145mm
Weight	3.45kg
Storage status	Wet
Cover	ABS
Terminal	Z1
Container bottom	ABS
Positive plate	PbO ₂
Negative plate	Pb
Separator	AGM
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Way of sealing	Epoxy resin

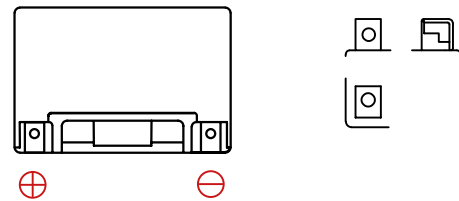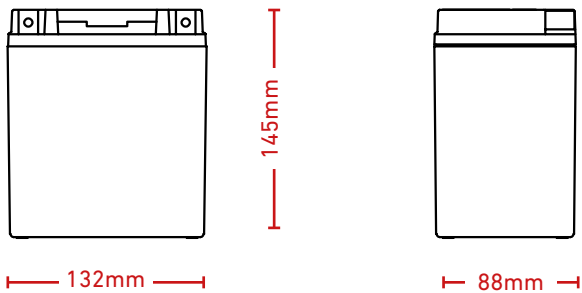

Discharge Current 25 °C

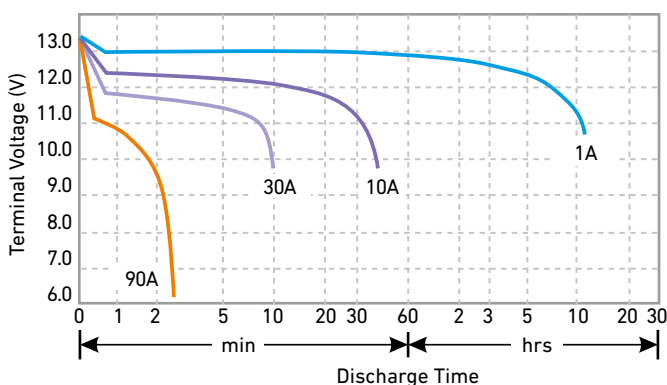

Residual Capacity

