



YTX7A-BS

7Ah | 12V | 130A

Electrical Specifications



Nominal voltage	12V
Nominal capacity (25°C)	7Ah at 10h
CCA -18 °C	130A

Retention of Charge During Storage at 25°C		
1 month	97%	Directly mounted
3 months	90%	Directly mounted
6 months	80%	Constant voltage: 14.4V Limit current: 1.4A Charging time: 2 - 3h


12 months	40%	Constant voltage: 14.4V Limit current: 1.4A Charging time: 4 - 6h
-----------	-----	-------------------------------------------------------------------------

Mechanical Specifications

Measurements (L x W x H)	150 x 87 x 94mm
Weight	2.40kg
Storage status	Wet
Cover	ABS
Terminal	C4
Container bottom	ABS
Positive plate	PbO ₂
Negative plate	Pb
Separator	AGM
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Way of sealing	Epoxy resin

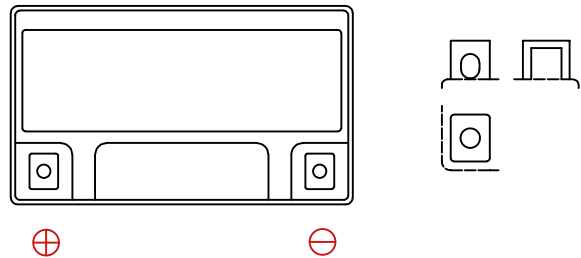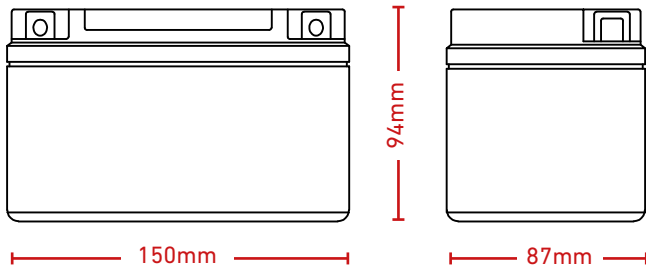

Discharge Current 25 °C

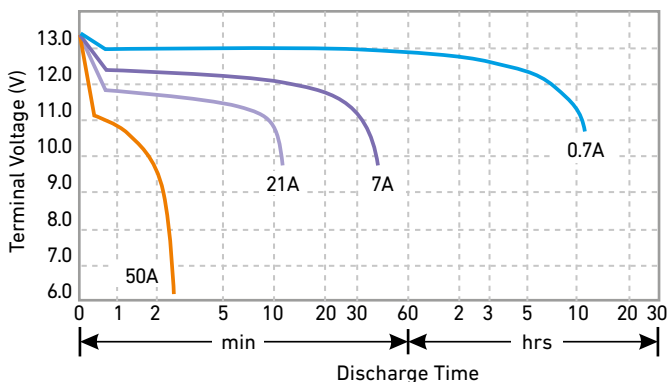

Residual Capacity

