

[accurat]

SPORT

GEL TECHNOLOGY



YTX20L-BS

20 Ah | 12 V | 290 A




Electrical Specifications

| | |
|--------------------------|---------------|
| Nominal voltage | 12 V |
| Nominal capacity (25 °C) | 20 Ah @10 hrs |
| CCA -18 °C | 290 A |


| Retention of Charge During Storage @ 25 °C | | |
|--|------|--|
| 1 month | 97 % | Directly mounted |
| 3 months | 90 % | Directly mounted |
| 6 months | 80 % | Constant voltage: 14.4 V Limit current: 4 A Charging time: 2 - 3 hrs |
| 12 months | 40 % | Constant voltage: 14.4 V Limit current: 4 A Charging time: 4 - 6 hrs |

Mechanical Specifications


| | |
|--------------------------|------------------------|
| Measurements (L x W x H) | 175 x 87 x 155 mm |
| Approx. weight | 6.2 kg |
| Storage status | Wet |
| Cover | ABS |
| Terminal | Z2 (Cu) |
| Container bottom | ABS |
| Positive plate | PbO ₂ |
| Negative plate | Pb |
| Separator | AGM |
| Electrolyte | Diluted sulphuric acid |
| Safety valve | Rubber |
| Way of sealing | Epoxy Resin |



Discharge Current 25 °C

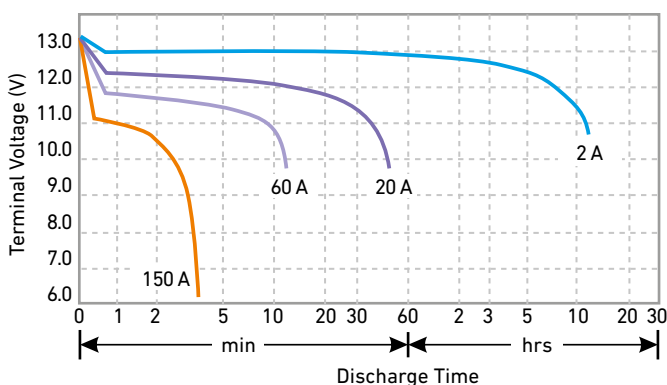

Residual Capacity

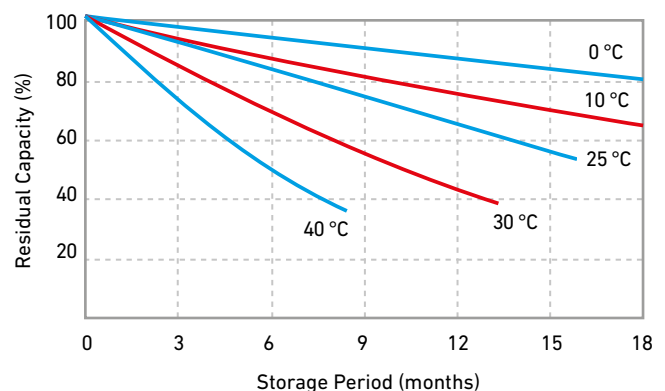

batterium GmbH | Robert-Bosch-Straße 1
71691 Freiberg am Neckar | Germany
T: +49 7141 / 560 90 40